


Hoopster® Rings (Metric)

XHHM/XHHMU Series

Stock items available in:

- Carbon steel
- 302 stainless steel

Select XHHM with bent end to facilitate easy removal.

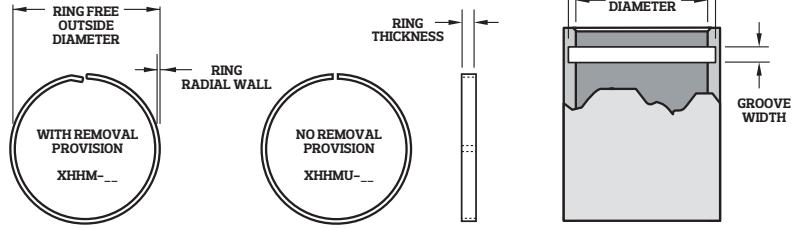

Metric (mm)	Part No. ^{1,2}	Housing Diameter	Ring				Groove		Groove Yield (N) ³
			Outside Diameter	Radial Wall	Thickness	Diameter ⁴	Width		
	XHHM-10	10	10,63	0,43	1,14	10,43	1,27	1052	
	XHHM-11	11	11,65	0,43	1,14	11,43	1,27	1157	
	XHHM-12	12	12,67	0,43	1,14	12,43	1,27	1263	
	XHHM-13	13	13,79	0,53	1,65	13,53	1,78	1690	
	XHHM-14	14	14,81	0,53	1,65	14,53	1,78	1820	
	XHHM-15	15	15,83	0,53	1,65	15,53	1,78	1950	
	XHHM-16	16	16,85	0,53	1,65	16,53	1,78	2080	
	XHHM-17	17	17,87	0,53	1,65	17,53	1,78	2210	
	XHHM-18	18	18,97	0,61	2,24	18,61	2,36	2674	
	XHHM-19	19	19,99	0,61	2,24	19,61	2,36	2822	
	XHHM-20	20	21,01	0,61	2,24	20,61	2,36	2971	
	XHHM-21	21	22,03	0,61	2,24	21,61	2,36	3119	
	XHHM-22	22	23,05	0,61	2,24	22,61	2,36	3268	
	XHHM-23	23	24,07	0,61	2,24	23,61	2,36	3417	
	XHHM-24	24	25,09	0,61	2,24	24,61	2,36	3565	
	XHHM-25	25	26,11	0,61	2,24	25,61	2,36	3714	
	XHHM-26	26	27,28	0,76	3,00	26,76	3,12	4828	
	XHHM-27	27	28,30	0,76	3,00	27,76	3,12	5013	
	XHHM-28	28	29,32	0,76	3,00	28,76	3,12	5199	
	XHHM-29	29	30,34	0,76	3,00	29,76	3,12	5385	
	XHHM-30	30	31,36	0,76	3,00	30,76	3,12	5570	
	XHHM-31	31	32,38	0,76	3,00	31,76	3,12	5756	
	XHHM-32	32	33,40	0,76	3,00	32,76	3,12	5942	
	XHHM-33	33	34,52	0,86	3,81	33,86	3,94	6945	
	XHHM-34	34	35,54	0,86	3,81	34,86	3,94	7155	
	XHHM-35	35	36,56	0,86	3,81	35,86	3,94	7365	
	XHHM-36	36	37,58	0,86	3,81	36,86	3,94	7576	
	XHHM-37	37	38,60	0,86	3,81	37,86	3,94	7786	
	XHHM-38	38	39,62	0,86	3,81	38,86	3,94	7997	
	XHHM-40	40	41,66	0,86	3,81	40,86	3,94	8418	
	XHHM-41	41	42,68	0,86	3,81	41,86	3,94	8628	
	XHHM-42	42	43,70	0,86	3,81	42,86	3,94	8838	
	XHHM-45	45	46,87	0,97	4,75	45,97	4,88	10584	
	XHHM-47	47	48,91	0,97	4,75	47,97	4,88	11054	
	XHHM-48	48	49,93	0,97	4,75	48,97	4,88	11289	
	XHHM-50	50	51,97	0,97	4,75	50,97	4,88	11760	
	XHHM-51	51	52,99	0,97	4,75	51,97	4,88	11995	
	XHHM-52	52	54,01	0,97	4,75	52,97	4,88	12230	
	XHHM-55	55	57,07	0,97	4,75	55,97	4,90	12936	
	XHHM-56	56	58,09	0,97	4,75	56,97	4,90	13171	
	XHHM-57	57	59,11	0,97	4,75	57,97	4,90	13406	
	XHHM-58	58	60,13	0,97	4,75	58,97	4,90	13641	
	XHHM-60	60	62,17	0,97	4,75	60,97	4,90	14112	
	XHHM-62	62	64,38	1,14	5,72	63,14	5,87	17268	
	XHHM-63	63	65,40	1,14	5,72	64,14	5,87	17547	
	XHHM-64	64	66,42	1,14	5,72	65,14	5,87	17826	
	XHHM-65	65	67,44	1,14	5,72	66,14	5,87	18104	
	XHHM-67	67	69,48	1,14	5,72	68,14	5,87	18661	
	XHHM-68	68	70,50	1,14	5,72	69,14	5,87	18940	
	XHHM-70	70	72,54	1,14	5,72	71,14	5,87	19497	
	XHHM-72	72	74,58	1,14	5,72	73,14	5,87	20054	
	XHHM-75	75	77,64	1,14	5,72	76,14	5,87	20889	
	XHHM-76	76	78,66	1,14	5,72	77,14	5,87	21168	

¹ Use "HHM" prefix for removal provision end. Use "HHMU" prefix for no removal provision. ² Add suffix "-S02" for 302 stainless steel.

³ Based on a groove material yield strength of 310 N/mm² and a safety factor of 2 ⁴ Sharp corners on the groove required